


<b>MAIN BOOM DUTIES, Fixed Ballast, 360°</b>				
Radius (m)	8.45	14.4	20.35	26.3
3	30	17		
3.5	23.75	17	9	
4	20.5	15.5	9	
4.5	17.9	14.2	9	6.8
5	15.9	13.2	9	6.8
5.5	14.2	12.2	9	6.8
6	12.8	11.4	9	6.8
6.5	11.6	10.6	8.5	6.8
7		9.9	8.1	6.8
8		8.2	7.3	6.1
9		6.75	6.6	5.5
10		5.65	6	5
11		4.8	5.1	4.6
12		4.1	4.4	4.2
13			3.85	3.85
14			3.35	3.55
15			2.95	3.15
16			2.6	2.8
17			2.3	2.5
18			2	2.2
19				1.95
20				1.75
22				1.4
24				1.1
24.5				1

<b>FLY JIB DUTIES, Fixed Ballast, 360°</b>		
Boom Angle	Jib offset	
	5°	30°
80°	3	2
75°	3	2
70°	3	2
65°	2.5	1.85
60°	2.1	1.7
55°	1.6	1.45
50°	1.35	1.25
45°	1.15	1.05
40°	0.9	0.8
35°	0.7	0.7
30°	0.55	0.55

## TADANO AR-300E

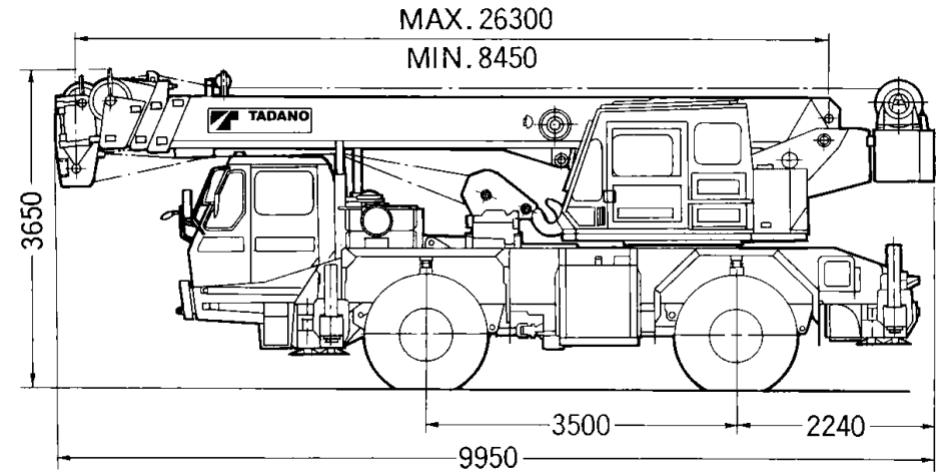

Overall width.....2,500 mm  
 Tail swing radius.....2,890 mm  
 Tread(track) – Front.....2,065 mm  
 – Rear .....2,065 mm